

## 36"x36"x36" Lined Super Sac


### Flexible Intermediate Bulk Containers Specifications

#### DESCRIPTION:

**DIMENSIONS:** Woven PP bulk bag (5oz coated) 36" x 36" x 36"  
**CONSTRUCTION:** U panel  
**FABRIC:** Coated White Fabric  
**FILL TOP:** 30" duffle top

**POUCH:** Yes  
**LINER:** 3mil PE inserted  
**PRINTING:** No  
**SIFTPROOF:** No  
**SAFETY BAND:** No  
**LIFT LOOPS:** 2" wide, 4 @ 10" Tall, White

**SAFE WORKING LOAD:** 3000 lbs  
**SAFETY FACTOR:** 5:1 SF

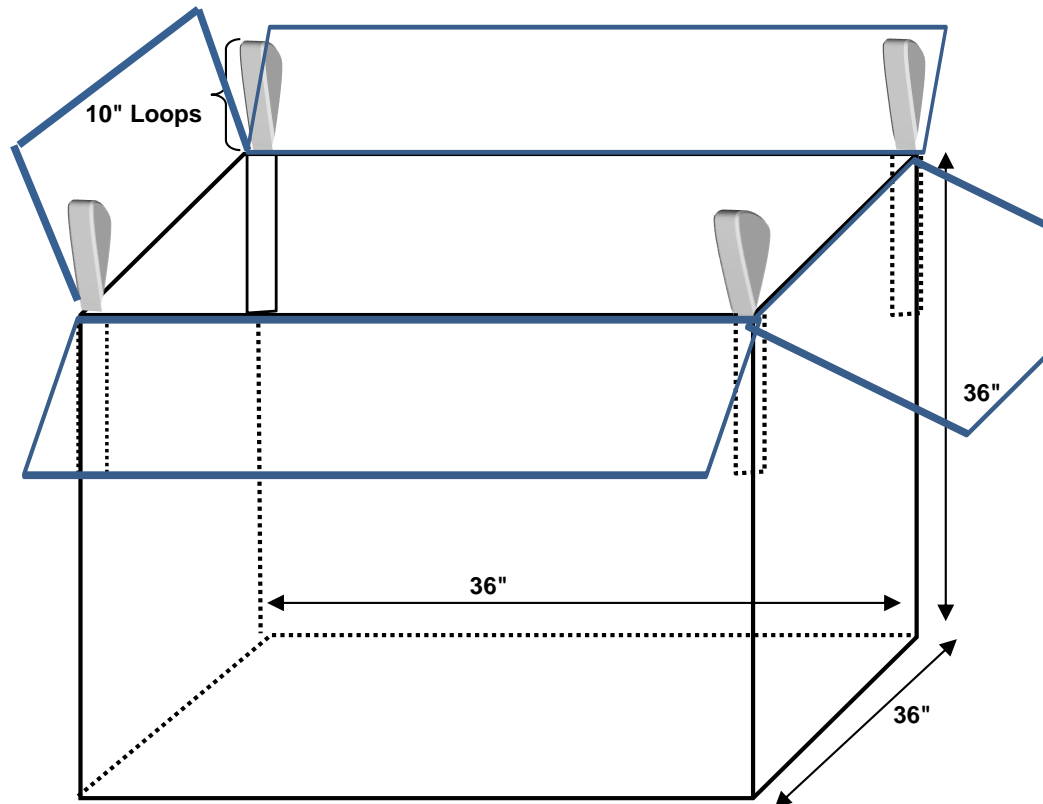

---

**TECHNICAL DATA**  
MATERIAL SPECIFICATIONS

**5 OZ Coated Polypropylene**

PROPERTIES	TEST METHOD	VALUES
THICKNESS	N/A	~12 MIL
WEIGHT	ASTM D 1910	5 oz per yd <sup>2</sup>
TENSIL STRENGTH	ASTM D 4623	282x279 lbs.
BURST STRENGTH	ASTM D 3786	588 lbs. Per inch
PUNCTURE	ASTM D 4833	146 lbs.
U V RESISTANCE	ASTM D 4355	<70% after 1200 Hours
WATER PERMIABILITY	CAPI AT 16" HEAD	NIL
MOISTURE VAPOR TRAN.	ASTM E 96 66	8.8

**\*\*BAG IS LINED WITH A STANDARD 3 MIL POLYETHYLENE LINER**

**3mil Polyethylene Liner**

**MATERIAL:**

- Low-density
- Sulfur free
- Amide, Amine, & Silicon free
- Latex free
- BHT free (Butylated hydroxy toluene)
- Chlorine free

**TEMPERATURE:** 20 - 150 F

**RECYCLING:** Recyclable

**APPEARANCE:** Not opaque

**Strength Comparisons**

Low Density	Equals High Density
1.5 mil	.5 mil
2 mil	.75 mil
3 mil	1 mil
5 mil	2 mil

**SPECIFICATIONS:**

Meets ASTM D3951